

INSTRUKSJONER TIL BRUKERE AV MIDLERTIDIGE ELEKTRISKE ANLEGG

1. En kompetent person skal ha tilsyn med anlegget og være ansvarlig for driften. Feil bruk av det elektriske anlegget kan medføre fare for personskade og brann.
2. Sentralen skal plasseres loddrett eller på stativ, og med fritt betjeningsområde foran sentralen.
3. Faste tilkoblinger av kabler og bytte av sikringer skal bare utføres av fagfolk. Ved fast tilkobling av gummikabler skal strekkavlastningens klemflate være utført i isolasjonsmateriale. Ikke-fagfolk skal kun betjene jordfeilbryter, automatsikring og uttak for stikkontakter.
4. Sentralens dører skal være lukket og om nødvendig også låst. Dørene skal bare åpnes ved betjening av sentralen.
5. Elektriske apparater som er koblet til sentralen, skal kobles fra eller gjøres spenningsløse når de ikke er i bruk, for å unngå utilsiktet igangsetting eller anven delse av disse.
6. De elektriske apparatene som brukes, må oppfylle forskriftene og skal enten være utstyrt med ekstra isolasjon eller, i klasse 1-utførelse, med jordet stikkontakt.
7. Kabler må legges slik at de ikke blir skadet. Det gjelder kabler både innenfor og utenfor dørene.
8. Kabler eller apparater med feil skal frakobles og ikke tas i bruk igjen før de defekte delene er skiftet eller reparert.
9. Knivsikring må bare byttes av kompetent personale.

INSTRUCTIONS FOR USERS OF TEMPORARY ELECTRICAL INSTALLATIONS

1. Operation of the installation must be supervised by an authorised person. Incorrect use of the electrical installation could mean risk of personal injury and fire.
2. The distribution unit must be installed vertical or on a stand so that there is free access in front of the unit.
3. Permanent cable connection or replacement of fuses may only be carried out by qualified personnel. Permanently connected rubber-insulated cables must be secured with a restraint that has an insulating gripping surface. Unqualified personnel may only operate earth leakage circuit breakers, miniature circuit breakers and plug sockets.
4. Distribution unit doors must be closed and, where required, also locked. Doors must only be left open when carrying out work on the distribution unit.
5. Electrical equipment that is connected to distribution units must be disconnected or switched off when not in use in order to avoid unintentional starting up or switching on.
6. Electrical equipment that is used must comply with the requirements and must either have additional insulation or comply with class I and have an earthed plug.
7. Cables inside and outside the doors must be routed so as to avoid damaging them.
8. Cables or equipment that are defective must be disconnected and not used until the defective parts have been replaced or repaired.
9. Blade fuses may only be replaced by personnel who have the necessary training.

ARTIKELNR / ARTICLE NO. EB13803			
MÅRKSTRØM/ CURRENT RATING 32		A	
SPÅNNING/ VOLTAGE 400		V	
MEASURING EQUIPMENT			
CURR- TRAFO- SPACE	ENERGY- METER- SPACE		
FAST ANSLUTNING/ FIXED CONNECTIONS			
<125A		>125A	
CEE-OUTLETS 3-POLE			
16A	32A	63A	125A
SCHUKO OUTLETS			
16A			
6			
CEE-OUTLETS 4-POLE			
16A	32A	63A	125A
CEE-OUTLETS 5-POLE/400V			
16A	32A	63A	125A
JFB/RCD/RCBO			
0,01A	0,03A	0,1A	
3			
JFB/RCD/RCBO			
0,3A	0,5A	Variable	
VIKT/WEIGHT			
3,2			kg


This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.

U 32MINI//6-3 EN 4P



RITAD AV/DRAWN BY CG	DATUM/DATE 180925	NEXT SHEET 2	SHEET 1
SIGN	REVISION/ISSUE A*	RITINGS NR./DRAWING EB13803	

A B C D E F G H J K

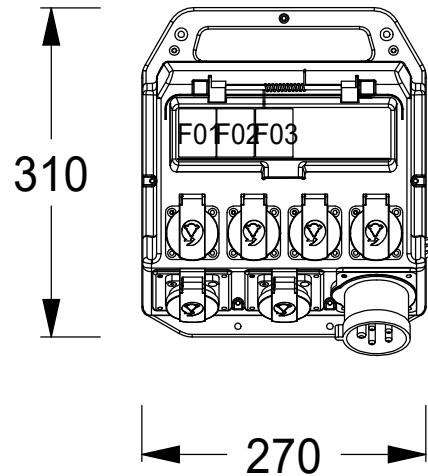


ARTIKELNR / ARTICLE NO. EB13803			
MÄRKSTRÖM / CURRENT RATING 32 A			
SPÄNNING / VOLTAGE 400 V			
MEASURING EQUIPMENT			
CURR- TRAFO- SPACE	ENERGY- METER- SPACE		
FAST ANSLUTNING/ FIXED CONNECTIONS			
<125A	>125A		
CEE-OUTLETS 3-POLE			
16A	32A	63A	125A
SCHUKO OUTLETS			
16A			
6			
CEE-OUTLETS 4-POLE			
16A	32A	63A	125A
CEE-OUTLETS 5-POLE/400V			
16A	32A	63A	125A
JFB/RCD/RCBO			
0,01A	0,03A	0,1A	
3			
JFB/RCD/RCBO			
0,3A	0,5A	Variable	
VIKT/WEIGHT			
3,2 kg			

This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.

U 32MINI//6-3 EN 4P



RITAD AV/DRAWN BY CG	DATUM/DATE 180925	NEXT SHEET 3	SHEET 2
SIGN	REVISION/ISSUE A*	RITNING NR./DRAWING EB13803	

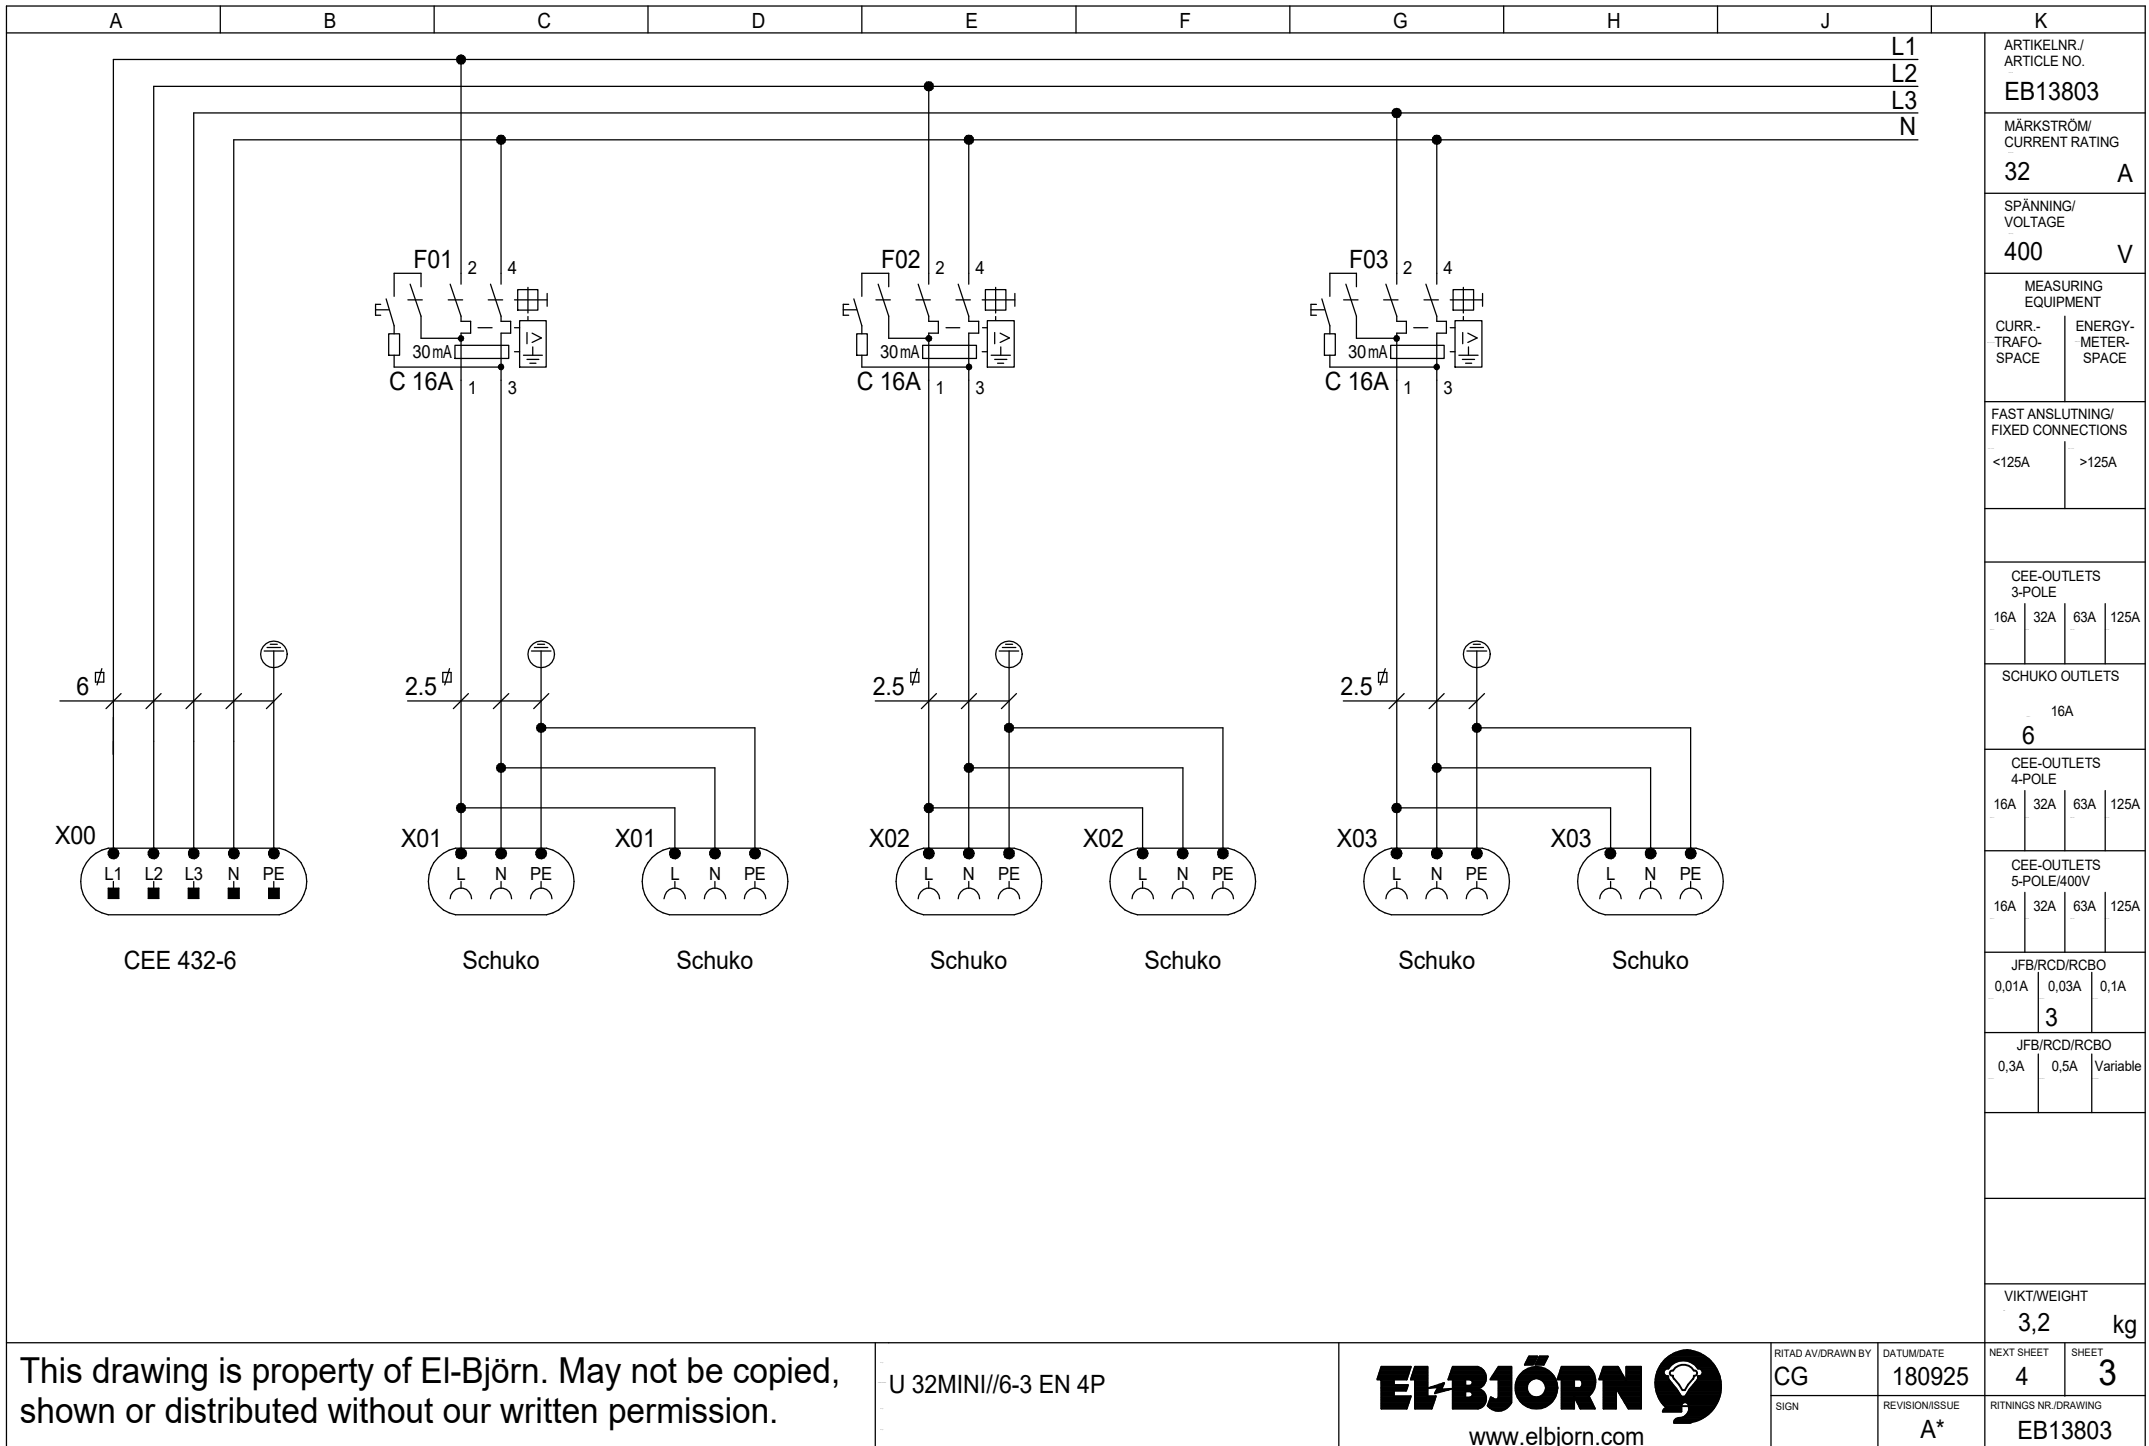

L1
L2
L3
N

ARTIKELNR / ARTICLE NO. EB13803			
MÄRKSTRÖM / CURRENT RATING 32	A		
SPÄNNING / VOLTAGE 400	V		
MEASURING EQUIPMENT			
CURR- TRAFO- SPACE	ENERGY- METER- SPACE		
FAST ANSLUTNING/ FIXED CONNECTIONS			
<125A	>125A		
CEE-OUTLETS 3-POLE			
16A	32A	63A	125A
SCHUKO OUTLETS			
16A			
6			
CEE-OUTLETS 4-POLE			
16A	32A	63A	125A
CEE-OUTLETS 5-POLE/400V			
16A	32A	63A	125A
JFB/RCD/RCBO			
0,01A	0,03A	0,1A	
3			
JFB/RCD/RCBO			
0,3A	0,5A	Variable	
VIKT/WEIGHT			
3,2 kg			

This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.

U 32MINI//6-3 EN 4P



RITAD AV/DRAWN BY CG	DATUM/DATE 180925	NEXT SHEET 4	SHEET 3
SIGN	REVISION/ISSUE A*	RITINGS NR./DRAWING EB13803	

A	B	C	D	E	F	G	H	J	K
PC.	Position	Description	Type	Manufacturer	Data	Article No.	E-number(SE)		ARTIKELNR / ARTICLE NO. EB13803
1	-	Underdel	Mini	El-Björn AB	310x270x115mm	35000			MÄRKSTRÖM/ CURRENT RATING 32 A
1		Överdel	Mini	El-Björn AB	11mod	35004			SPÄNNING/ VOLTAGE 400 V
2		Säkringslock	Mini	El-Björn AB	11mod	35016			
1		Axel	Säkringslock	El-Björn AB	4x158mm	30110			MEASURING EQUIPMENT
3	F01-F03	RCBO	PKPM2-16/2/C/003-A	Eaton	10kA, 2P, C 16A, 30	108111	2162432		CURR- TRAFO- SPACE
1	X00	Intag	432BU6	ABB	32A, 400V, IP44	2CMA193451R1000	2417347		ENERGY- METER- SPACE
6	X01-X03	Schukouttag	Typ F	Mennekes	230V, 16A, IP54	11020EB			FAST ANSLUTNING/ FIXED CONNECTIONS
2	X03	Täcklock	GP/GF	El-Björn AB	72x72 Schuko, Blå	34007			<125A >125A
									CEE-OUTLETS 3-POLE
									16A 32A 63A 125A
									SCHUKO OUTLETS
									16A
									6
									CEE-OUTLETS 4-POLE
									16A 32A 63A 125A
									CEE-OUTLETS 5-POLE/400V
									16A 32A 63A 125A
									JFB/RCD/RCBO
									0,01A 0,03A 0,1A
									3
									JFB/RCD/RCBO
									0,3A 0,5A Variable
									VIKT/WEIGHT
									3,2 kg

This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.

U 32MINI//6-3 EN 4P



RITAD AV/DRAWN BY
CG

DATUM/DATE
180925

NEXT SHEET
4

SIGN

REVISION/ISSUE
A*

RITINGS NR./DRAWING
EB13803