


A	B	C	D	E	F	G	H	J	K
---	---	---	---	---	---	---	---	---	---

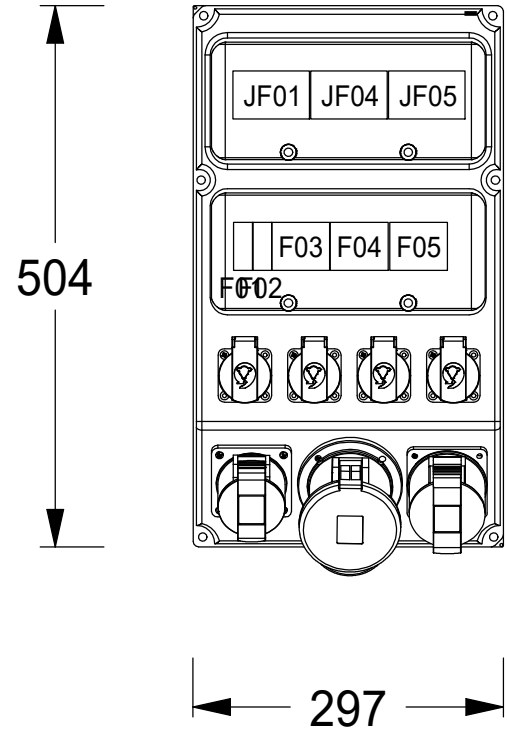

ARTIKELNR / ARTICLE NO. EB11091			
MÄRKSTRÖM / CURRENT RATING 100 A			
SPÄNNING / VOLTAGE 400 V			
MEASURING EQUIPMENT			
CURR- TRAFO- SPACE	ENERGY- METER- SPACE		
FAST ANSLUTNING / FIXED CONNECTIONS			
<125A	>125A		
CEE-OUTLETS 3-POLE			
16A	32A	63A	125A
SCHUKO OUTLETS			
16A			
4			
CEE-OUTLETS 4-POLE			
16A	32A	63A	125A
1	1	1	
CEE-OUTLETS 5-POLE/400V			
16A	32A	63A	125A
1	1	1	
JFB/RCD/RCBO			
0,01A	0,03A	0,1A	
2			
JFB/RCD/RCBO			
0,3A	0,5A	Variable	
1			
VIKT/WEIGHT			
5,5 kg			


Djup: 177mm

This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.

UF 100II//4111-201 EN



RITAD AV/DRAWN BY CG	DATUM/DATE 190123	NEXT SHEET 2	SHEET 1
SIGN	REVISION/ISSUE A*	RITNING NR./DRAWING EB11091	

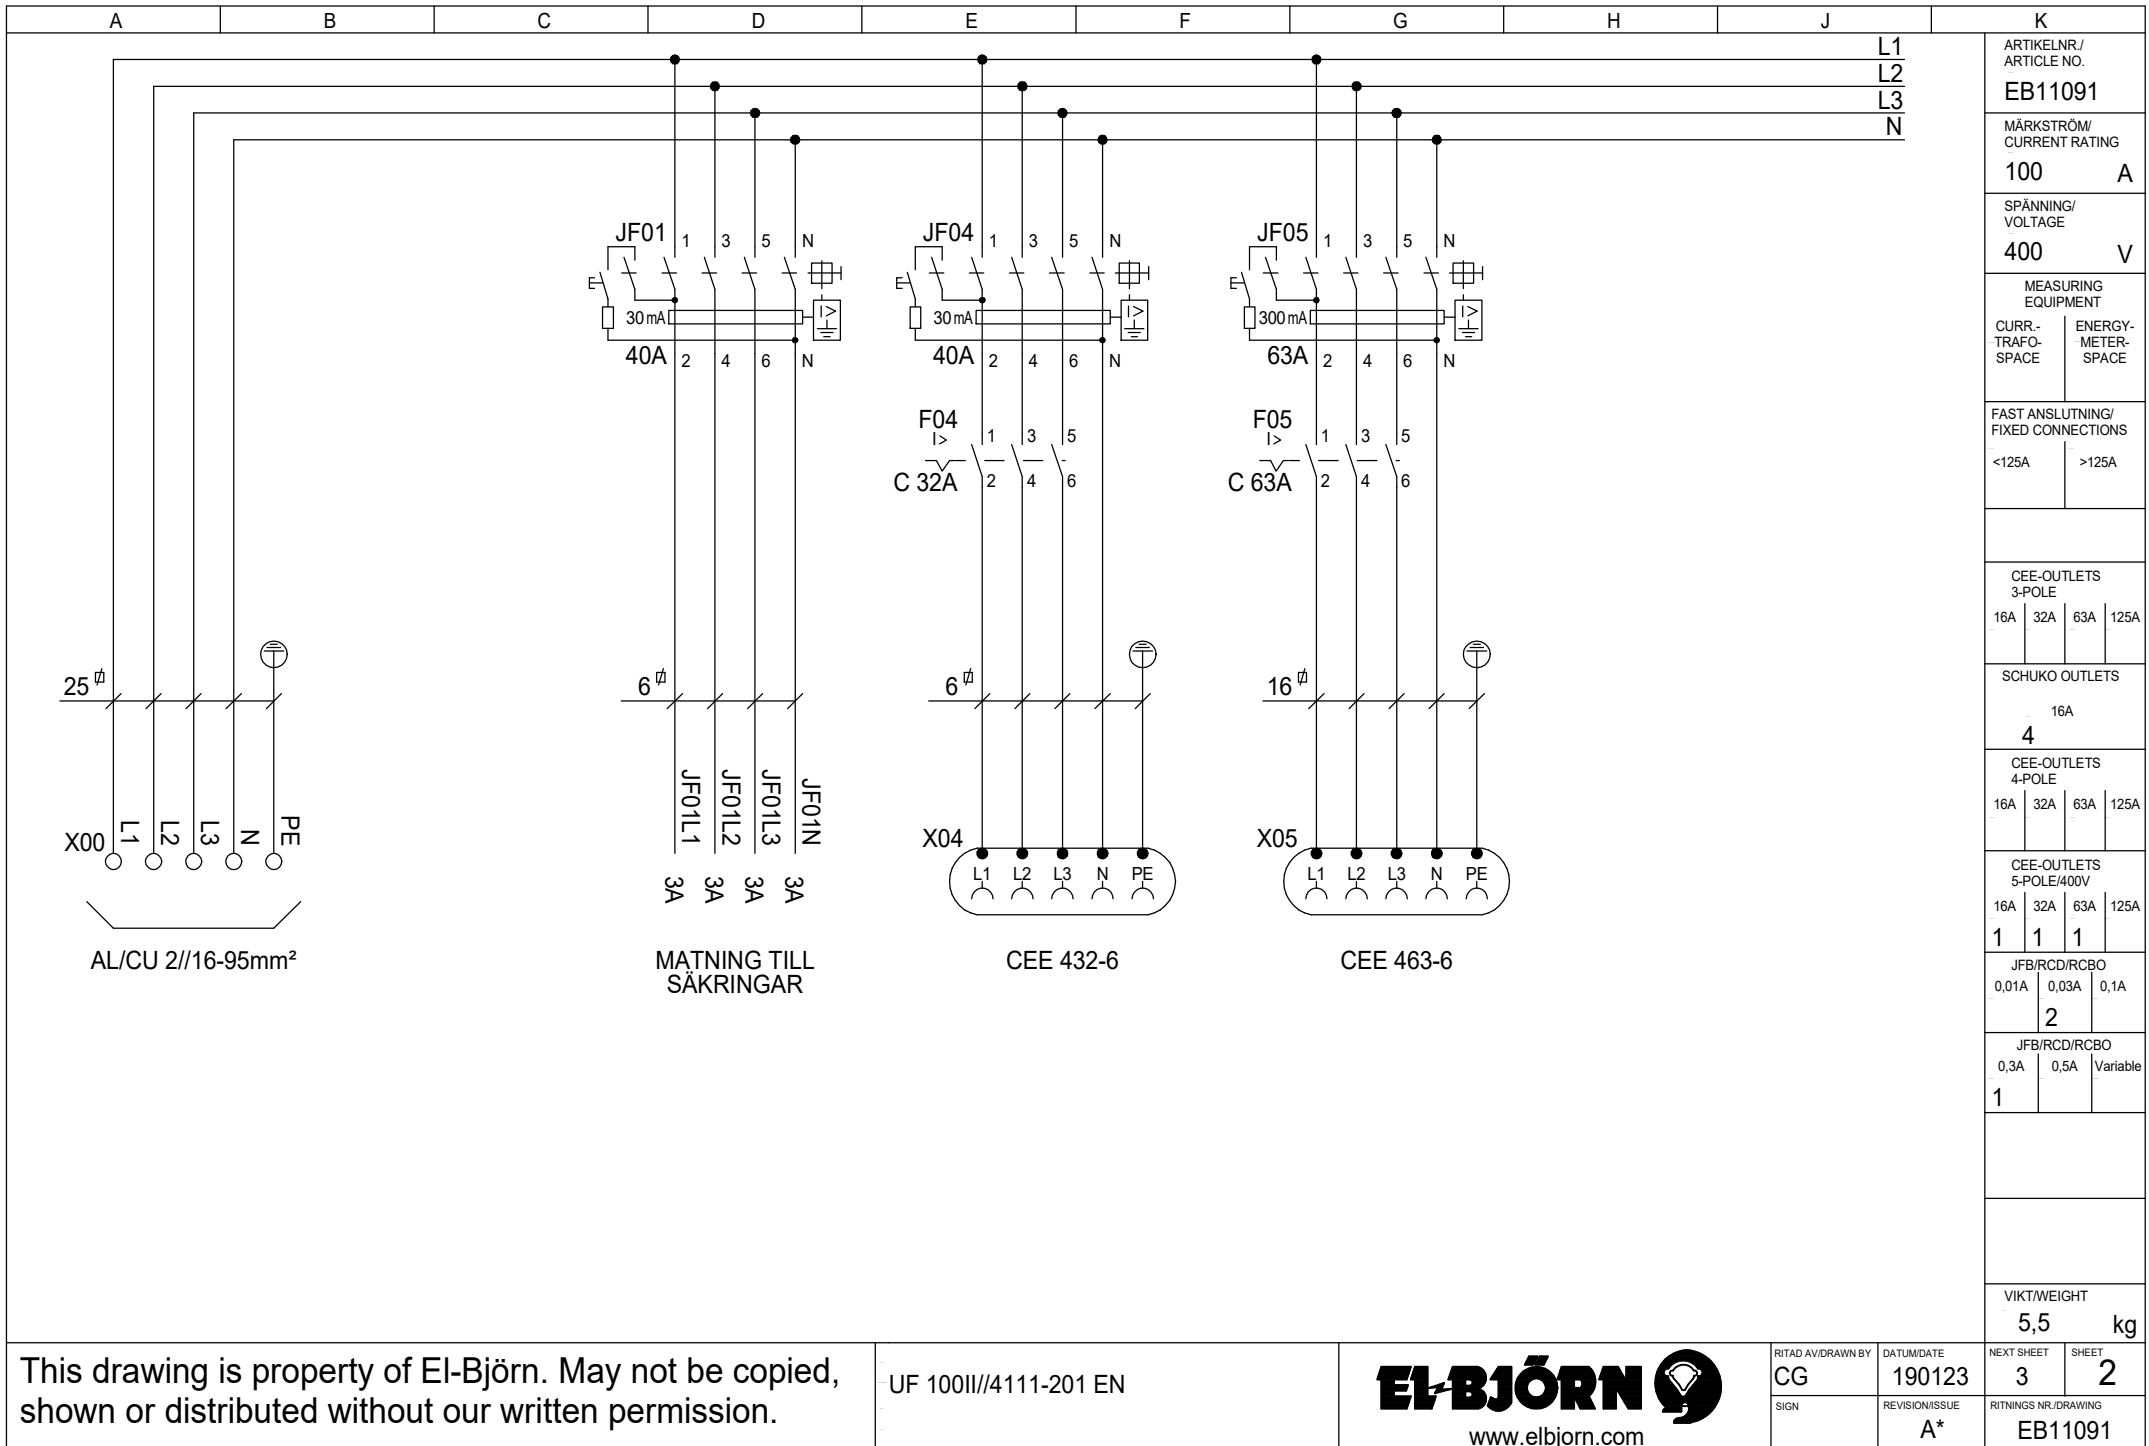


This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.

UF 100II//4111-201 EN



RITAD AV/DRAWN BY	DATUM/DATE	NEXT SHEET	SHEET
CG	190123	3	2
SIGN	REVISION/ISSUE	RITINGS NR./DRAWING	
	A*	EB11091	

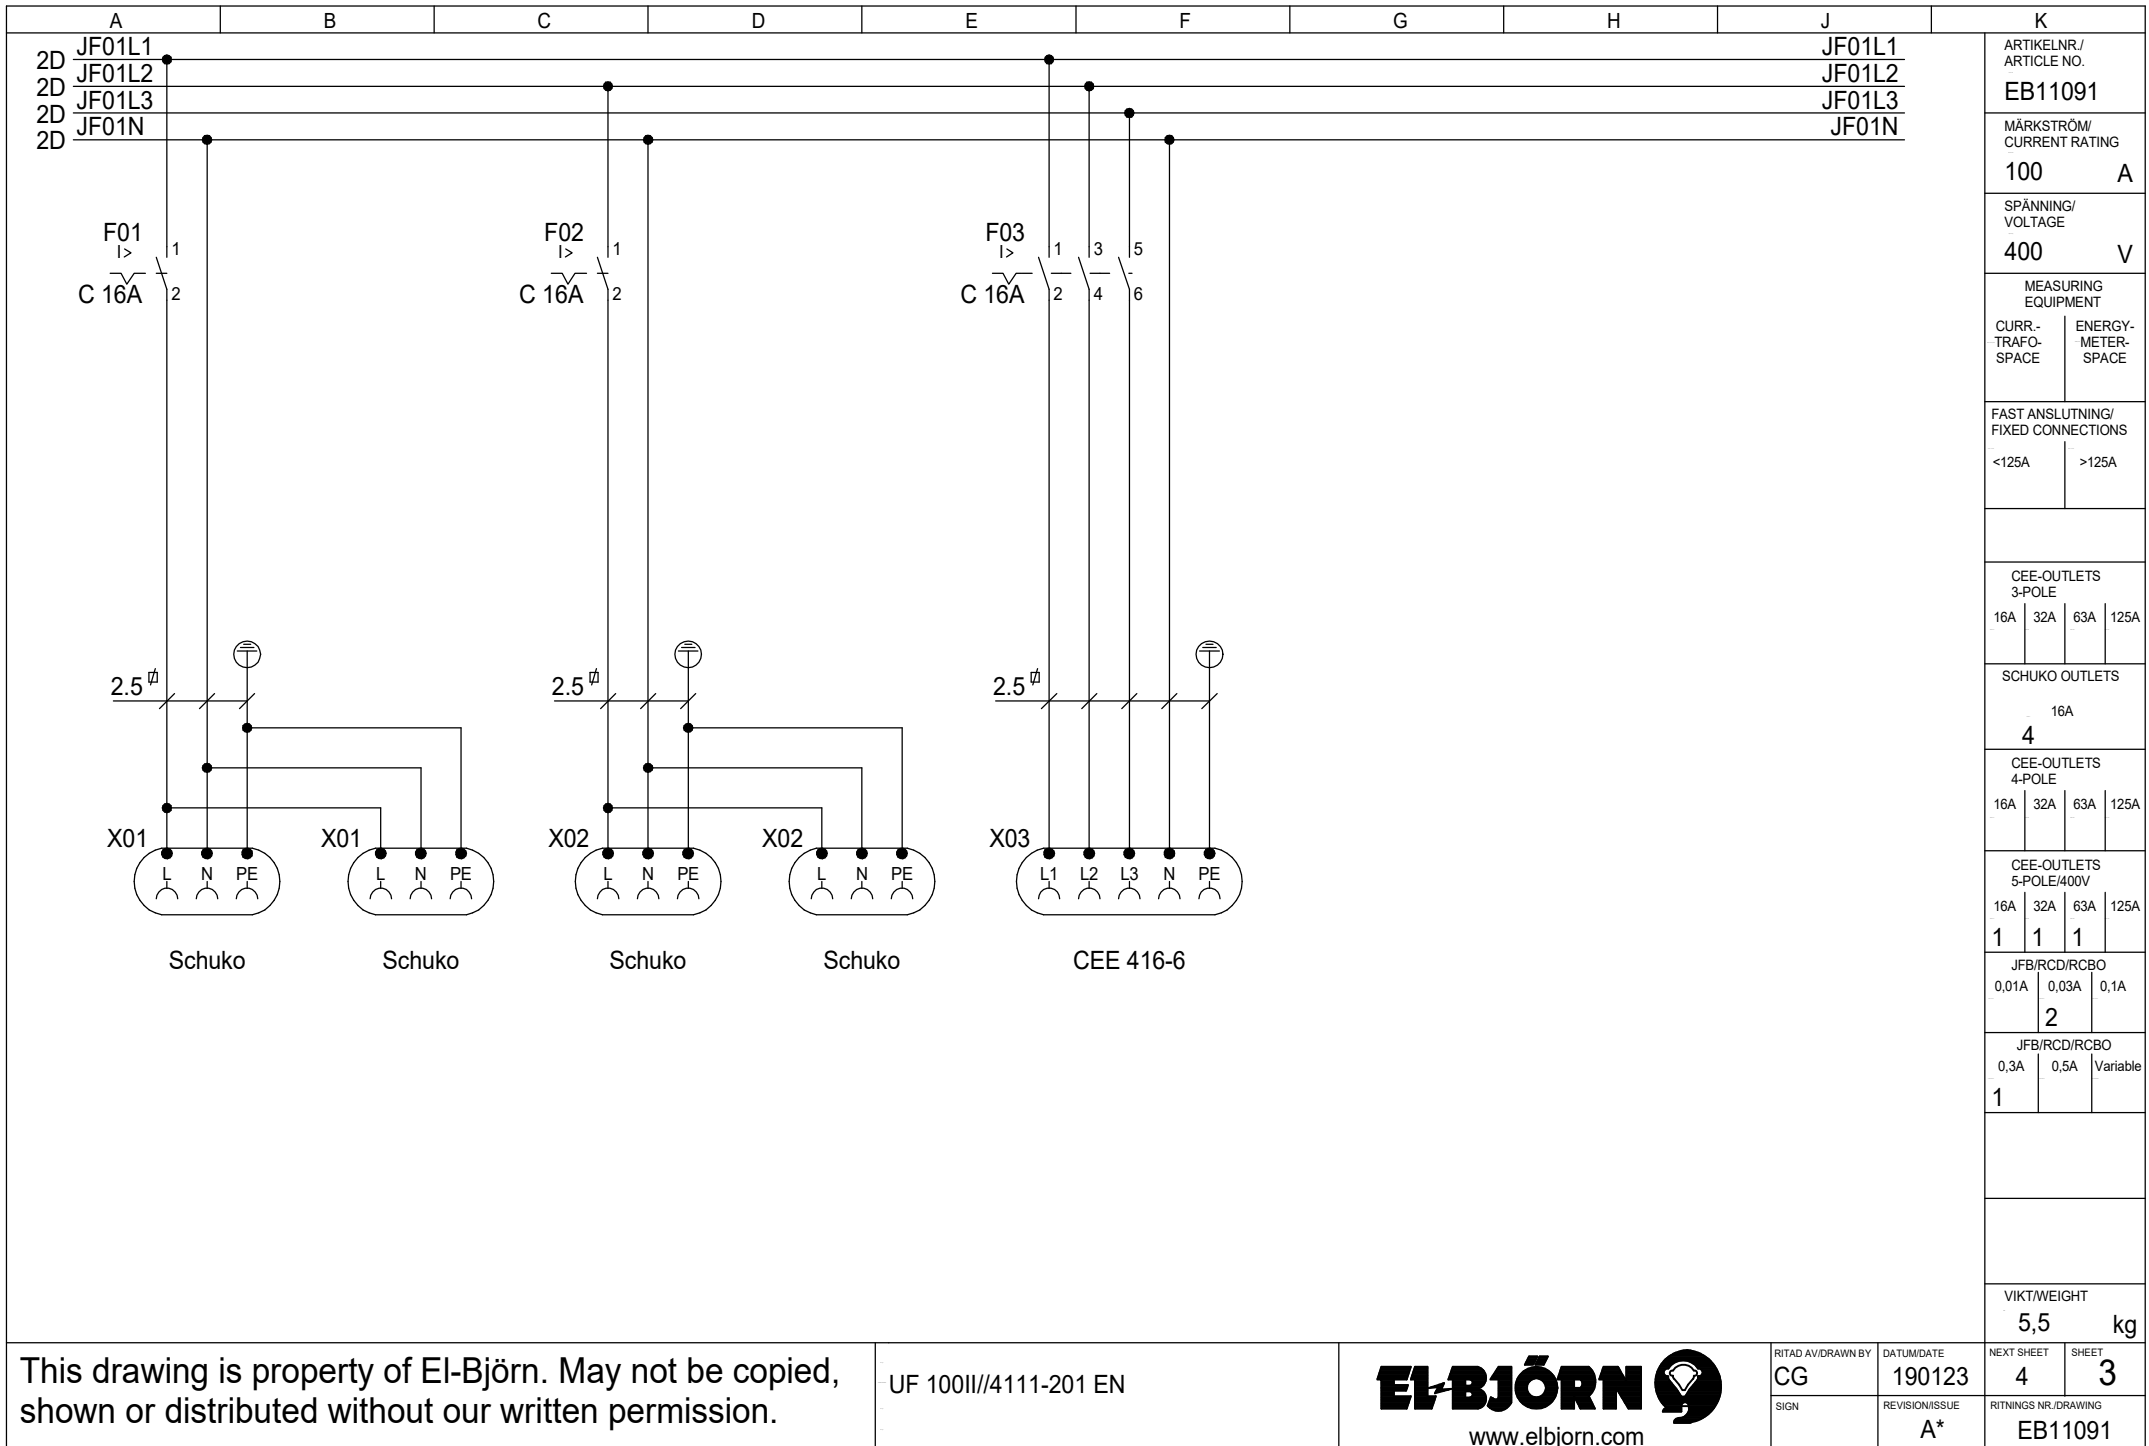

This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.

UF 100II//4111-201 EN



RITAD AV/DRAWN BY CG	DATUM/DATE 190123	NEXT SHEET 4	SHEET 3
SIGN	REVISION/ISSUE A*	RITNING NR./DRAWING EB11091	

A	B	C	D	E	F	G	H	J	K
PC.	Position	Description	Type	Manufacturer	Data	Article No.	E-number(SE)		ARTIKELNR / ARTICLE NO. EB11091
1	-	Kapsling	67TC26	Idé	504x297x177, 24mod	17.24.GM			MÄRKSTRÖM/ CURRENT RATING 100 A
2	F01-F02	MCB	iC60N	Schneider Electric	C 16A, 1P, 6kA	A9F04116	2112043		SPÄNNING/ VOLTAGE 400 V
1	F03	MCB	iC60N	Schneider Electric	C 16A, 3P, 6kA	A9F04316	2112073		MEASURING EQUIPMENT CURR- TRAFO- SPACE ENERGY- METER- SPACE
1	F04	MCB	iC60N	Schneider Electric	C 32A, 3P, 6kA	A9F04332	2112076		FAST ANSLUTNING/ FIXED CONNECTIONS <125A >125A
1	F05	MCB	iC60N	Schneider Electric	C 63A, 3P, 6kA	A9F04363	2112079		CEE-OUTLETS 3-POLE 16A 32A 63A 125A
2	JF01, JF04	RCD	iID	Schneider Electric	40A, 30mA, 4P, A	A9Z21440	2164955		SCHUKO OUTLETS 16A 4
1	JF05	RCD	iID	Schneider Electric	63A, 300mA, 4P, A	A9Z24463	2164974		CEE-OUTLETS 4-POLE 16A 32A 63A 125A
3	X00	Universalklämma	KE 67	Ensto	AL/CU 2//16-95mm ²	KE 67	2673571		CEE-OUTLETS 5-POLE/400V 16A 32A 63A 125A 1 1 1
1		Universalklämma	KE 67.2	Ensto	AL/CU 2//16-95mm ²	KE 67.2	2673572		JFB/RCD/RCBO 0,01A 0,03A 0,1A 2
1		Universalklämma	KE 67.3	Ensto	AL/CU 2//16-95mm ²	KE 67.3	2673573		JFB/RCD/RCBO 0,3A 0,5A Variable 1
4	X01-X02	Schukouttag	Typ F	Mennekes	230V, 16A, IP54	11020EB			VIKT/WEIGHT 5,5 kg
1	X03	Uttag	416RU6	ABB	16A, 400V, IP44	2CMA192642R1000	2416633		RITAD AV/DRAWN BY CG
1	X04	Uttag	432RU6	ABB	32A, 400V, IP44	2CMA192658R1000	2416660		DATUM/DATE 190123
1	X05	Uttag	463RU6	ABB	63A, 400V, IP44	2CMA192664R1000	2416680		NEXT SHEET 4
									REVISION/ISSUE A*
									RTINGS NR./DRAWING EB11091

This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.

UF 100II//4111-201 EN



RITAD AV/DRAWN BY
CG

DATUM/DATE
190123

NEXT SHEET
4

SIGN

REVISION/ISSUE
A*

RTINGS NR./DRAWING
EB11091